

# 0408RN

## Precious metal commutation


Applications: Wearable device, mobile phones, tablet PC, health care equipment, etc.

### Characteristics

			-17-10	-5-10(P3)
1	Voltage	V	3	2.7
2	Terminal resistance	$\Omega$	32	32
3	Speed	rpm	12000	8500
4	Current	mA	75	70
5	Starting voltage	V	1.4	1.5
6	Stall current	mA	95	100
7	Weight	g	0.8	1.15
8	Operating temperature range	$^{\circ}\text{C}$	-10~+55	-10~+50

### Outline Drawing

UNIT:mm

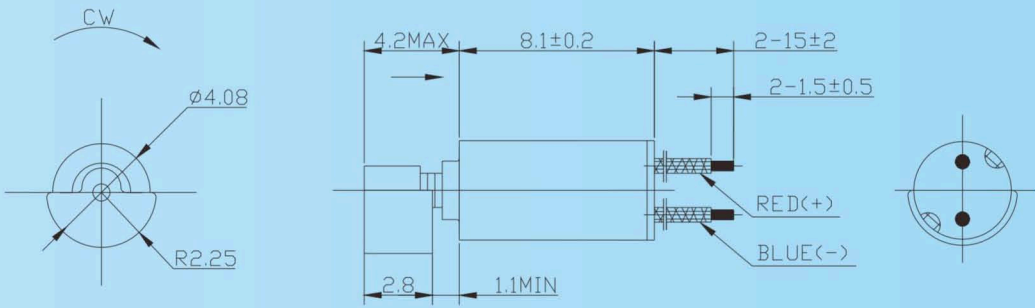

0408RN-17-10aM-15X

### Options

- Lead wires length
- Shaft length
- Eccentric weight
- Silicone sets