

DC CORELESS MOTOR

0610RN

Precious metal commutation


Applications: Wearable device, mobile phones, tablet PC, health care equipment, etc.

Characteristics

			-1-19	-33-80(S)
1	Voltage	V	1.3	1.3
2	Terminal resistance	Ω	8.9	13.1
3	Speed	rpm	10000	8700
4	Current	mA	80	65
5	Starting voltage	V	0.8	0.8
6	Stall current	mA	150	120
7	Weight	g	1.8	1.8
8	Operating temperature range	$^{\circ}\text{C}$	-10~+50	-10~+50

Outline Drawing

UNIT:mm

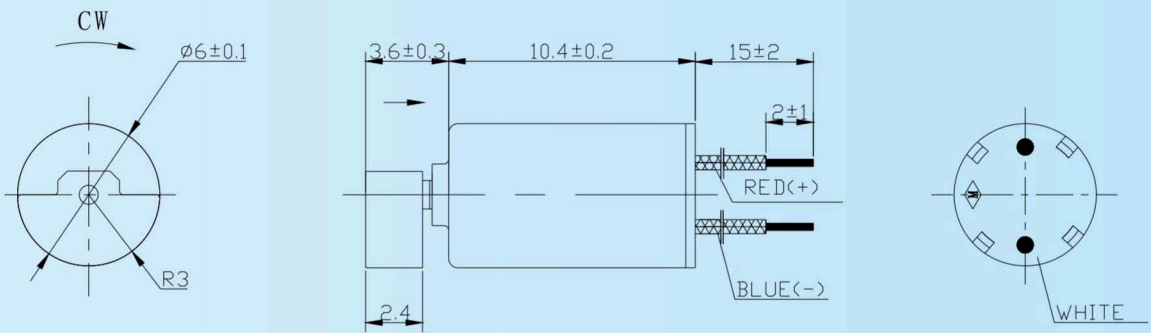

0610RN03-1-19-15A1

Options

- Lead wires length
- Shaft length
- Eccentric weight
- Silicone sets