

0612RN

Precious metal commutation


Applications: Wearable device, mobile phones, tablet PC, health care equipment, etc.

Characteristics

			-10-42
1	Voltage	V	1.3
2	Terminal resistance	Ω	7.8
3	Speed	rpm	9500
4	Current	mA	70
5	Starting voltage	V	0.8
6	Stall current	mA	200
7	Weight	g	2.3
8	Operating temperature range	$^{\circ}\text{C}$	-10~+50

Outline Drawing

UNIT:mm

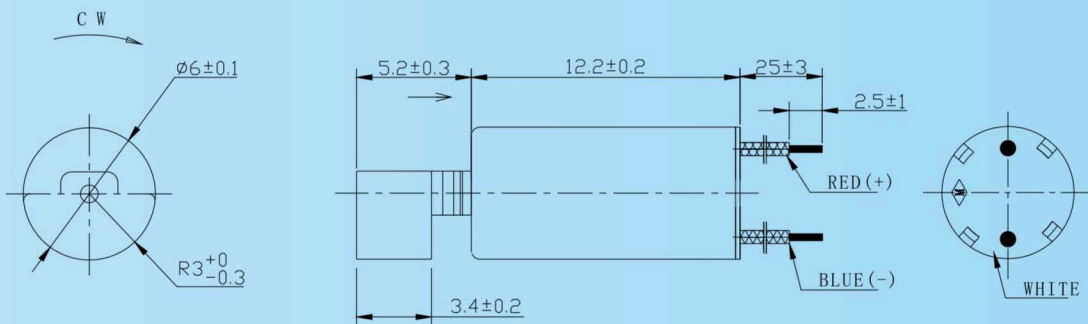

0612RN01-10-42-25A7L46

Options

- Lead wires length
- Shaft length
- Eccentric weight
- Silicone sets