

1015RN


Precious metal commutation

Applications: Wearable device, mobile phones, tablet PC, health care equipment, etc.

Characteristics

			-7-87
1	Voltage	V	1.3
2	Terminal resistance	Ω	1.1
3	Speed	rpm	12000
4	Current	mA	530
5	Starting voltage	V	0.8
6	Stall current	mA	1250
7	Weight	g	6.5
8	Operating temperature range	$^{\circ}\text{C}$	-20~+65

Outline Drawing

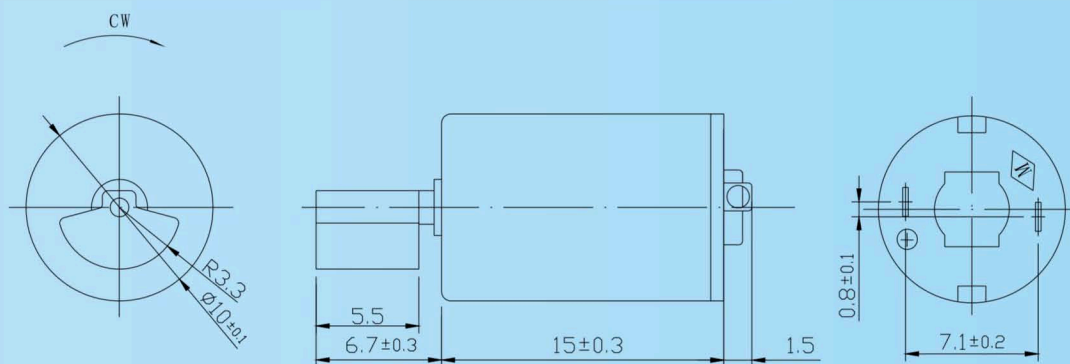

1015RN01-7-87L13

Options

- Lead wires length
- Shaft length
- Eccentric weight