

## DC CORELESS MOTOR

### 0614RN


Precious metal commutation

Applications: Wearable device, mobile phones, tablet PC, health care equipment, etc.

#### Characteristics

			-5-51	-0-51
1	Voltage	V	3	3
2	Terminal resistance	$\Omega$	17	17
3	Speed	rpm	11000	12400
4	Current	mA	50	32
5	Starting voltage	V	0.6	0.6
6	Stall current	mA	180	170
7	Weight	g	2.9	2.6
8	Operating temperature range	$^{\circ}\text{C}$	-10~+65	-10~+65

#### Outline Drawing

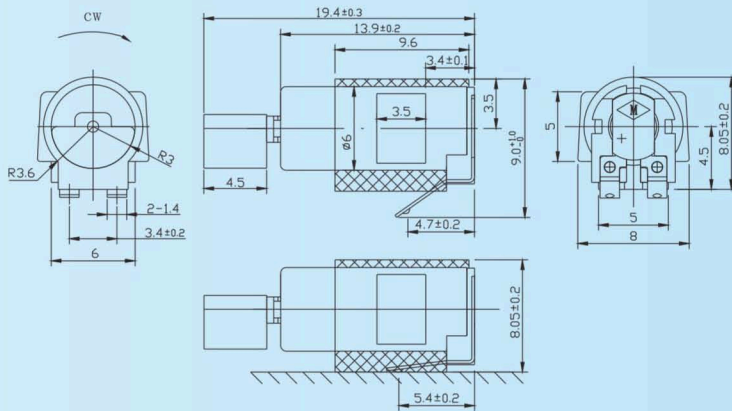

UNIT:mm

0614RN51E-5-51SJ4-3.0

#### Options

- Lead wires length
- Shaft length
- Eccentric weight
- Silicone sets